

Bunker Coastal Aluminium Bulkhead Round Eyelid

12W/16W/18W

All-in-one

Applications:

Residential and
Commercial Applications.

Product Performance

Wattage	12W/16W/18W
Colour Temperature	4CCT (2200K/3000K/4000K/6000K)
Stock Code	Black - IC014E White - IC015E
Operating Temperature	-20~45°C
Life Span/ LB Rating	L80B10@50 000hrs
IP Rating	IP65
LED Driver	PioLED High Spec Driver
Beam Angle	120°
Impact Protection Grade	IK08
Input Voltage	100V-265V
Surge Protection	2kV
CRI	>80
Lumen Output	130lm/W
Lumen Efficiency (per watt)	12W=1560lm 16W=2080lm 18W=2340lm
LED Chips	Sanan
LED Chips Qty	240
Dimmable	Non-Dimmable
Dimmable Range	-
(Dali/Trailing/Leading)	-
Note	Suitable for Emergency Battery Backup Kit


Physical Characteristics

Weight (g)	1530g
Housing Material	Aluminium + PC
Product Dimensions (mm)	Ø280*H109
Cable Length	30cm
Mounting Option	Surface Mount
Bracket Material	-
Bolts and Screws	304 Stainless Steel

Packaging



Dimension Drawing

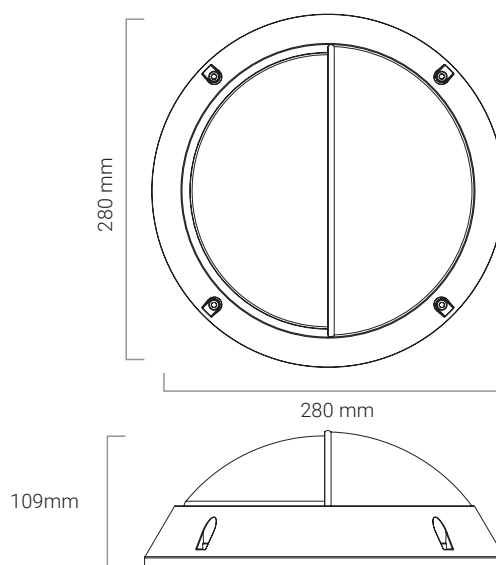

Technical Parameters

Input Current	0.05-0.12A
Output Voltage	108V
Humidity	65%
Frequency	50-60Hz
In Rush Current	140A
Output Current	0.165A
TA & TC	Ta -90°C & Tc 85°C
IES (Yes or No)	Yes

Regulatory Qualifications

Class Rating	Class II
Energy Efficiency	A
Certification	CE

Accessories

Optional accessories

-

Packaging info

Storage Temp	20~40°C
Carton Size (cm)	58.5×30×36
QTY/CTN	6
Net Weight	9.2
Gross Weight	11.3

E&OE

PioLED Lighting (Pty) Ltd | 031 701 5746 | info@pioledlighting.africa

www.pioledlighting.co.za