

Combat T5 Tube

2ft, 10W

Applications:

Residential and Commercial Applications.

- Frosted Glass diffuser coupled with internal aluminium providing fast and efficient heat dissipation.
- Aluminium end caps providing a traditional T5 fluorescent look and feel.
- Direct 220V LED Lamp with no requirements for traditional ballasts or starters.
- 2835 SMD LED Chips delivering 90lm/W with a 270° beam angle.
- The perfect LED tube for day to day usage with a built in 1kV surge protection.
- Wide input voltage range from 180- 265V.
- Instant on LED Tube with no warm up time.
- High CRI>80 ideal for environments which require high colour rendering.
- Maintenance free alternative to fluorescent lamps with a much

Product Performance

Wattage	10W
Colour Temperature & Stock	6000K - T505 4000K - T506
Operating Temperature	-20~45°C
Life Span/ LB Rating	L70B50@25000 Hrs
IP Rating	IP20
LED Driver Brand	PioLED High Spec Driver
Beam Angle	270°
Input Voltage	180V- 265V
Surge Protection	1kv
CRI	>83
Lumen Output	800
Lumen Efficiency	>90lm/W
LED Chips	2835 Sanan
LED Chips Qty	48
Dimmable	No
Dimmable Range	-
(Dali/Trailing/Leading)	-


Physical Characteristics

Weight (g)	75
Housing Material	Glass, Aluminium end caps
Product Dimensions (mm)	549*16
Cable Length	-
Mounting Option	Surface
Bracket Material	-
Bolts and Screws	-

Packaging



Dimension Drawing

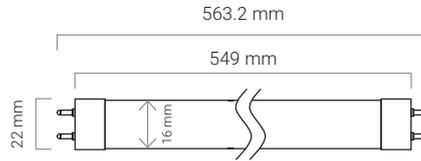

Technical Parameters

Input Current	91mA
Output Voltage	132V
Flicker (Y/N)	No Flicker
Humidity	80%
Frequency	50-60hz
In Rush Current	-
Output Current	70mA
THD	-
TA & TC	-
IES (Yes or No)	Yes

Regulatory Qualifications

Class Rating	Class I
Energy Efficiency	A
Certification	CE, EMC, IEC60598

Accessories

Optional accessories

-

Packaging info

Storage Temp	-20~80°C
Carton Size (mm)	62*28*29
QTY/CTN	100PCS
Net Weight	6
Gross Weight	8.15