



# A60 LED Lamp

9.5W

## Applications:

Residential and Commercial Applications.

**H**elp reduce your electricity bill by converting your bulbs to LED! The PioLED A60 9.5W is the ideal domestic lamp. Available in Warm White, Natural White & Cool White with bases of E27 or BC.

Our A60 9.5W is a maintenance-free, environmentally friendly alternative to incandescent lamps. LED products contain no mercury, lead, or other harmful substances, reducing your carbon footprint tremendously.



## Product Performance


<b>Wattage</b>	9.5W
<b>Colour Temperature &amp; Stock Code</b>	6000K (ES) <b>B016</b>   3000K (ES) <b>B017</b>   4000K (ES) <b>B018</b> 6000K (BC) <b>B019</b>   3000K (BC) <b>B020</b>
<b>Operating Temperature</b>	-10~40°C
<b>Life Span/ LB Rating</b>	L70B50@25000hrs
<b>IP Rating</b>	IP20
<b>LED Driver</b>	linear IC
<b>Beam Angle</b>	210°
<b>Impact Protection Grade</b>	-
<b>Input Voltage</b>	200V-240V
<b>Surge Protection</b>	0.5kV
<b>CRI</b>	>80
<b>Lumen Output</b>	1030 Lumens
<b>LED Chips</b>	2835
<b>LED Chips Qty</b>	8
<b>LED Chip Brand</b>	Sanan
<b>Dimmable (Dali/Trailing/Leading)</b>	Non-Dimmable
<b>Dimmable Range</b>	-
<b>(Dali/Trailing/Leading)</b>	-
<b>UGR</b>	-

## Physical Characteristics

<b>Weight (g)</b>	28.1
<b>Housing Material</b>	Aluminum + PC
<b>Product Dimensions (mm)</b>	60*110mm
<b>Cable Length</b>	-
<b>Mounting Option</b>	-
<b>Bracket Material</b>	-

## Luminous Intensity Distribution Diagram


C Plane Distribution Diagram

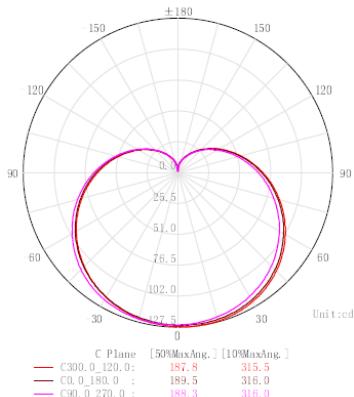

## Packaging



## Dimension Drawing



## Technical Parameters

<b>Input Current</b>	75mA
<b>Output Voltage</b>	270V
<b>Flicker(Y/N)</b>	No Flicker
<b>Humidity</b>	80%
<b>Frequency</b>	50/60Hz
<b>In Rush Current</b>	-
<b>Output Current</b>	30mA
<b>THD</b>	-
<b>TA &amp; TC</b>	-
<b>IES (Yes or No)</b>	Yes
<b>Regulatory Qualifications</b>	
<b>Class Rating</b>	Class II
<b>Energy Efficiency</b>	B016 - 107,44lm/W - <b>F</b> B017 - 106,59lm/W - <b>F</b> B018 - 115,91lm/W - <b>E</b> B019 - 107,44lm/W - <b>F</b> B020 - 106,59lm/W - <b>F</b>
<b>Certification</b>	CE
<b>Accessories</b>	
<b>Optional accessories</b>	---
<b>Packaging info</b>	
<b>Storage Temp</b>	-20°C~+80°C
<b>Carton Size (mm)</b>	33*33*24
<b>QTY/CTN</b>	50
<b>Net Weight</b>	2
<b>Gross Weight</b>	2.78

E&OE