

# Luka 3CCT Recessed Ceiling Light

9W

## Applications:

Residential and  
Commercial Applications.

- Backlit Round Recessed LED Ceiling Light, allowing for a cost effective LED Luminaire.
- 100lm/w 2835 SMD LED Chips, Available in 3CCT, with adjustable colour temperatures of 3000K, 4000K or 6000K.
- Instant On, environmentally friendly LED Ceiling Light containing no harmful chemicals or mercury.
- Opal Diffuser creating a soft uniform light distribution eliminating all visuals of the raw LEDs.
- The Luka ceiling light can be used in a wide range of indoor applications, such as living rooms, bedrooms, kitchens & offices.


## Product Performance

<b>Wattage</b>	9W
<b>Colour Temperature &amp; Stock</b>	<b>i051</b> 3CCT (3000K/4000K/6000K)
<b>Operating Temperature</b>	-20~40°C
<b>Life Span/ LB Rating</b>	L70B50
<b>IP Rating</b>	IP33
<b>LED Driver</b>	PiOLED Driver
<b>Beam Angle</b>	120°
<b>Input Voltage</b>	200V- 240V
<b>CRI</b>	>80
<b>Lumen Output</b>	>900@4000K
<b>Lumen Efficiency (per watt)</b>	>100lm/W
<b>LED Chips</b>	2835 SMD
<b>LED Chips Qty</b>	62
<b>Dimmable</b>	Non-Dimmable
<b>Dimmable Range</b>	-
<b>(Dali/Trailing/Leading)</b>	-
<b>UGR</b>	-
<b>Physical Characteristics</b>	
<b>Weight (g)</b>	75,4
<b>Housing Material</b>	PC
<b>Product Dimensions (mm)</b>	118*24.5
<b>Cable length</b>	12cm
<b>Mounting Option</b>	Recessed
<b>Bracket Material</b>	-
<b>Bolts and Screws</b>	-

## Packaging



## Dimension Drawing

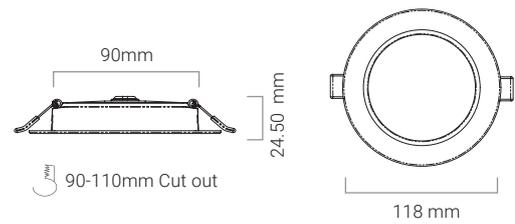

### Technical Parameters

<b>Input Current</b>	0.078A
<b>Output Voltage</b>	270V
<b>Humidity</b>	80%
<b>Frequency</b>	50-60Hz
<b>In Rush Current</b>	-
<b>Output Current</b>	0.03A
<b>TA &amp; TC</b>	-
<b>IES (Yes or No)</b>	Yes

### Regulatory Qualifications

<b>Class Rating</b>	Class I
<b>Energy Efficiency</b>	A
<b>Certification</b>	CE, CB, ERP, ROHS

### Accessories

<b>Optional accessories</b>	i051a - Surface Mount Trim White for LUKA 9W
-----------------------------	--

### Packaging info

<b>Storage Temp</b>	-20°C-80°C
<b>Carton Size (mm)</b>	64*39*26.6
<b>QTY/CTN</b>	100
<b>Net Weight (kg)</b>	8
<b>Gross Weight (kg)</b>	11.5

Surface Mount Case Available



E&OE

PioLED Lighting (Pty) Ltd | 031 701 5746 | info@pioledlighting.africa

www.pioledlighting.co.za