



Patrol V2 Day&Night Sensor Floodlight


30W

Applications:

Residential and
Commercial Applications.

Product Performance	
Wattage	30W
Colour Temperature & Stock Code	3CCT (3000/4000/6000K) - F507
Operating Temperature	-35~45°C
Life Span/ LB Rating	L70B50@20000 hrs
IP Rating	IP65
LED Driver Brand	DOB
Beam Angle	120°
Impact Protection Grade	IK06
Input Voltage	200V- 265V
Surge Protection	4kV
Power Factor	>0.9
CRI	>80
Lumen Output	3000lm
Lumen Efficiency	100lm/W
LED Chips	Sanan 2835
LED Chips Qty	84
Physical Characteristics	
Weight (kg)	520g
Housing Material	Aluminium
Product Dimensions (mm)	190*146*28
Cable Length	50cm
Mounting Option	-
Bracket Material	201 Stainless Steel Bracket
Bolts and Screws	304 Stainless Steel


Luminous Intensity Distribution Diagram



Packaging



Dimension Drawing

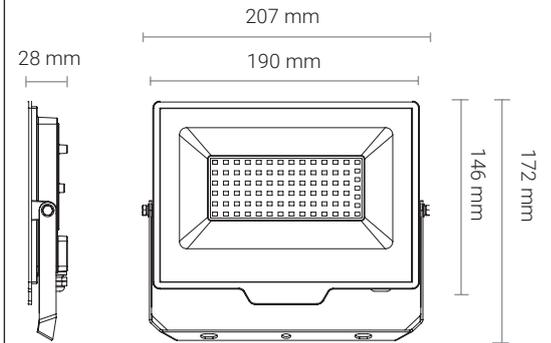

Technical Parameters

Input Current	0.13A
Output Voltage	252V
Humidity	40%-60%
Frequency	50/60Hz
In Rush Current	150A
Output Current	0.100A
THD	<20%
TA & TC	TA=90/TC=85
IES (Yes or No)	Yes

Regulatory Qualifications

Class Rating	Class I
Energy Efficiency	F
Certification	CE

Accessories

Optional accessories	-
-----------------------------	---

Packaging info

Storage Temp	-20~+40°C
Carton Size (cm)	43.5×37.5×19.5C
QTY/CTN	20
Net Weight	10,5
Gross Weight	12,4