

Webber Low UGR Dual line Panels

40W

Applications:

Residential and
Commercial Applications.

Product Performance

| | |
|--|--|
| Wattage | 40W |
| Colour Temperature & Stock Code | 3CCT(4000/5000/6000K) - iB125 White reflector 3CCT(4000/5000/6000K) - iB126 Black reflector |
| Operating Temperature | -20~40°C |
| Life Span/ LB Rating | L80B10@50 000hrs |
| IP Rating | IP40 |
| LED Driver | PioLED Driver |
| Beam Angle | 90° |
| Impact Protection Grade | - |
| Input Voltage | AC200V-240V |
| Surge Protection | 1.5kV |
| Power Factor | >0.9 |
| CRI | >80 |
| Lumen Output | 4800 Lumens |
| Lumen Efficiency | 120lm/W |
| LED Chips | 2835 |
| LED Chips Qty | 144 |
| LED Chip Brand | Sanan |
| Dimmable | Yes with Dimmable Driver i101Di (for 40W) |
| UGR | <16 |


Physical Characteristics

| | |
|--------------------------------|-----------------------------|
| Weight (g) | 1935 |
| Housing Material | PC & Iron Reflector - ABS |
| Product Dimensions (mm) | 595*595*17 |
| Cable Length | 15cm |
| Mounting Option | Surface/Hanging/Recessed |
| Bracket Material | - |
| Bolts and Screws | Stainless Steel |


Packaging



Luminous Intensity Distribution Diagram

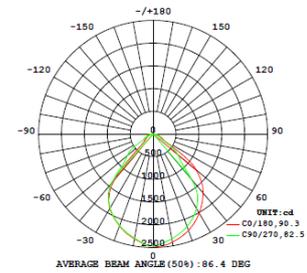

Dimension Drawing

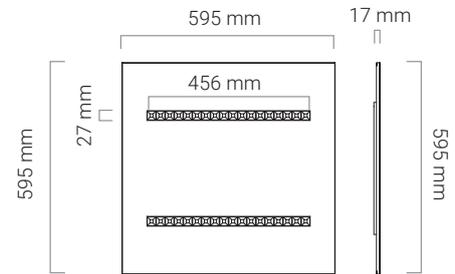

Technical Parameters

| | |
|------------------------|------------|
| Input Current | 210mA |
| Output Voltage | DC27-42V |
| Humidity | 80% |
| Frequency | 50-60Hz |
| In Rush Current | - |
| Output Current | 1000mA |
| THD | <15% |
| TA & TC | 45/80 |
| Flicker (Y/N) | No Flicker |
| IES (Yes or No) | Yes |

Regulatory Qualifications

| | |
|--------------------------|----------|
| Class Rating | Class II |
| Energy Efficiency | E |
| Certification | CE, RoHs |

Accessories

| | |
|-----------------------------|---|
| Optional accessories | 6x6 Back-Lit H65 Surface Mount Case - iB606 5Amp-3meter - R111 5Amp-2meter - R113 |
|-----------------------------|---|

Packaging info

| | |
|-------------------------|----------|
| Storage Temp | -20~80°C |
| Carton Size (mm) | 63*19*63 |
| QTY/CTN | 10 |
| Net Weight | 19,5 |
| Gross Weight | 20,5 |