




Delta Linear Highbay

240/200/150W


Applications: Industrial and Commercial Applications.

| Product Performance | |
|--|--|
| Wattage | 240/200/150W |
| Colour Temperature & Stock Code | 3CCT (4000/5000/5700K) HBL041 |
| Operating Temperature | -30~45°C |
| Life Span/ LB Rating | L80B10@50000hr |
| IP Rating | IP65 |
| LED Driver Brand | High Spec Flicker Free LiFud LED Driver |
| Beam Angle | 90° |
| Impact Protection Grade | IK09 |
| Input Voltage | AC100-277V |
| Surge Protection | 6kV |
| Power Factor | 0.9 |
| CRI | >80 |
| Lumen Output | 150W - 25 500lm 200W - 34 000lm 240W - 40 800lm |
| Lumen Efficiency | 170lm/W |
| LED Chips | Lumileds 3030 |
| LED Chips Qty | 468 |
| Dimmable | No |
| UGR | - |
| Physical Characteristics | |
| Weight (g) | 3200 |
| Housing Material | Pure Aluminium Housing |
| Product Dimensions (mm) | 792.4*129.1mm |
| Cable Length | 0.3 meter |
| Mounting Option | Bracket and Steel Rope |
| Bracket Material | Iron |
| Bolts and Screws | Stainless Steel |


Luminous Intensity Distribution Diagram

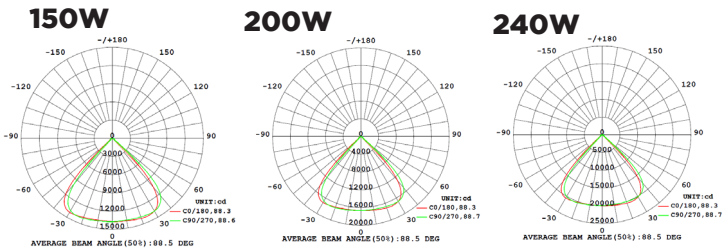

Packaging

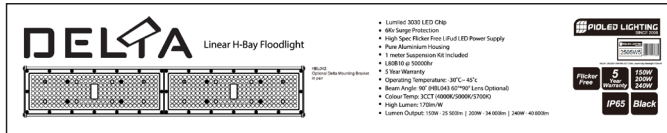

Dimension Drawing

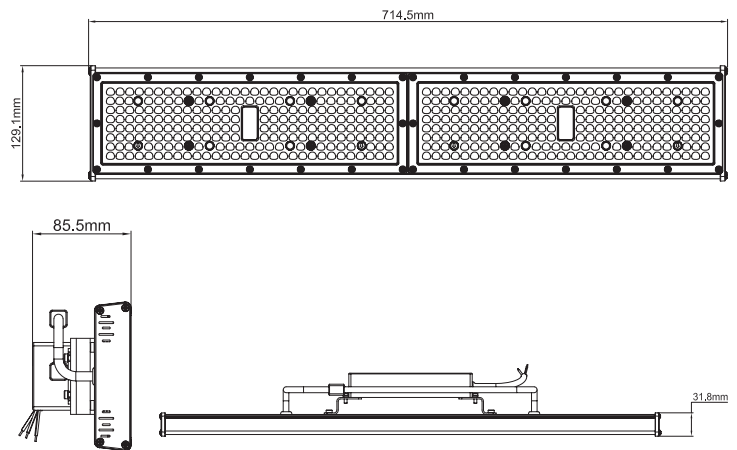

Technical Parameters

| | |
|---------------------------|---------------|
| Input Current | 1.07A@230V AC |
| Output Voltage | 180-260V |
| Flicker Free (Y/N) | Yes |
| Humidity | 10-90% |
| Frequency | 50-60hz |
| In Rush Current | 100A |
| Output Current | 0.75-1.1A |
| THD | <15% |
| TA & TC | 75 |
| IES (Yes or No) | Yes |

Regulatory Qualifications


| | |
|--------------------------|------------------|
| Class Rating | Class I |
| Energy Efficiency | A |
| Certification | E, EMC, IEC60598 |

Accessories

| | |
|-----------------------------|---|
| Optional accessories | HBL042 - Optional Delta Mounting Bracket in pair HBL043 - 60°*90° Optional Lens X 1 (240W needs 2) |
|-----------------------------|---|

Packaging info

| | |
|-------------------------|-------------|
| Storage Temp | -20~+90°C |
| Carton Size (mm) | 765*180*130 |
| QTY/CTN | 1 |
| Net Weight | 3,2 |
| Gross Weight | 4 |



**Dimension Drawing with
Mounting Bracket**

