




Delta Linear Highbay

240/200/150W


Applications: Industrial and Commercial Applications.

Product Performance	
Wattage	240/200/150W
Colour Temperature & Stock Code	3CCT (4000/5000/5700K) HBL041
Operating Temperature	-30~45°C
Life Span/ LB Rating	L80B10@50000hr
IP Rating	IP65
LED Driver Brand	High Spec Flicker Free LiFud LED Driver
Beam Angle	90°
Impact Protection Grade	IK09
Input Voltage	AC100-277V
Surge Protection	6kV
Power Factor	0.9
CRI	>80
Lumen Output	150W - 25 500lm 200W - 34 000lm 240W - 40 800lm
Lumen Efficiency	170lm/W
LED Chips	Lumileds 3030
LED Chips Qty	468
Dimmable	Yes
UGR	-
Physical Characteristics	
Weight (g)	3200
Housing Material	Pure Aluminium Housing
Product Dimensions (mm)	792.4*129.1mm
Cable Length	0.3 meter
Mounting Option	Bracket and Steel Rope
Bracket Material	Iron
Bolts and Screws	Stainless Steel


Luminous Intensity Distribution Diagram

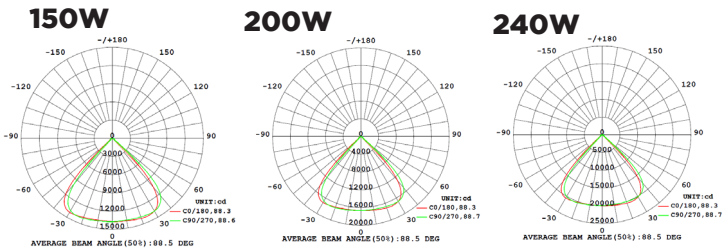

Dimension Drawing

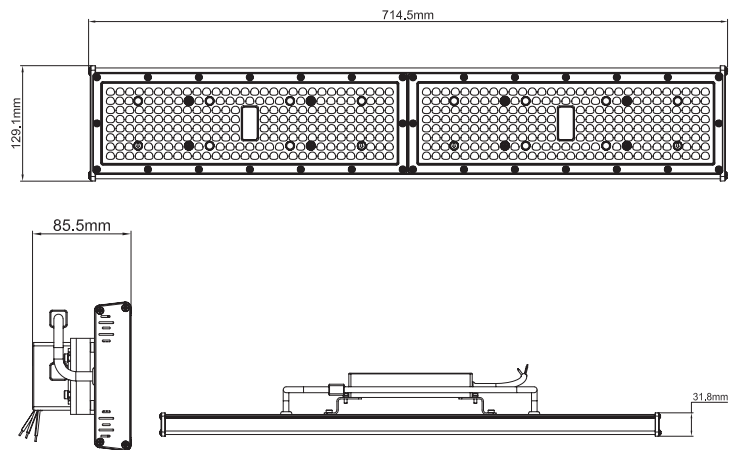

Packaging

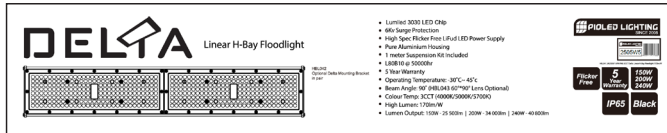

Technical Parameters

Input Current	1.07A@230V AC
Output Voltage	180-260V
Flicker Free (Y/N)	Yes
Humidity	10-90%
Frequency	50-60hz
In Rush Current	100A
Output Current	0.75-1.1A
THD	<15%
TA & TC	75
IES (Yes or No)	Yes

Regulatory Qualifications


Class Rating	Class I
Energy Efficiency	A
Certification	E, EMC, IEC60598

Accessories

Optional accessories
 HBL042 - Optional Delta Mounting Bracket in pair
 HBL043 - 60°*90° Optional Lens X 1 (240W needs 2)

Packaging info

Storage Temp	-20~+90°C
Carton Size (mm)	765*180*130
QTY/CTN	1
Net Weight	3,2
Gross Weight	4



**Dimension Drawing with
Mounting Bracket**

