



# Pakman 3CCT Round Tilt Downlighter


35W

## Applications:


Residential and  
Commercial Applications.

Product Performance	
<b>Wattage</b>	35W
<b>Colour Temperature &amp; Stock Code</b>	<b>HD026</b> 3CCT (3000K/4000K/6000K) Black <b>HD030</b> 3CCT (3000K/4000K/6000K) White
<b>Operating Temperature</b>	-15~45°C
<b>Life Span/ LB Rating</b>	L80B10@50000
<b>IP Rating</b>	IP20
<b>LED Driver</b>	PioLED High Spec Driver
<b>Beam Angle</b>	36°   340° Rotation
<b>Input Voltage</b>	200-265V
<b>CRI</b>	>80
<b>Power Factor</b>	0.9
<b>Surge Protection</b>	3kV
<b>Lumen Output</b>	3500lm
<b>Lumen Efficiency (per watt)</b>	100lm/W
<b>LED Chips</b>	High Lumen USA Bridgelux COB
<b>LED Chips Qty</b>	1pc COB
<b>Dimmable</b>	No
<b>Dimmable Range</b>	-
<b>(Dali/Trailing/Leading)</b>	-
<b>UGR</b>	19
Physical Characteristics	
<b>Weight (g)</b>	1320
<b>Housing Material</b>	Aluminium
<b>Product Dimensions (mm)</b>	Φ95 x 180
<b>Cable length</b>	-
<b>Mounting Option</b>	Surface Mount
<b>Bracket Material</b>	Aluminium
<b>Bolts and Screws</b>	Iron with nickel plating

## Packaging

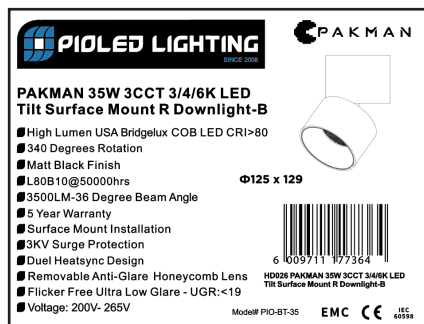

## Dimension Drawing

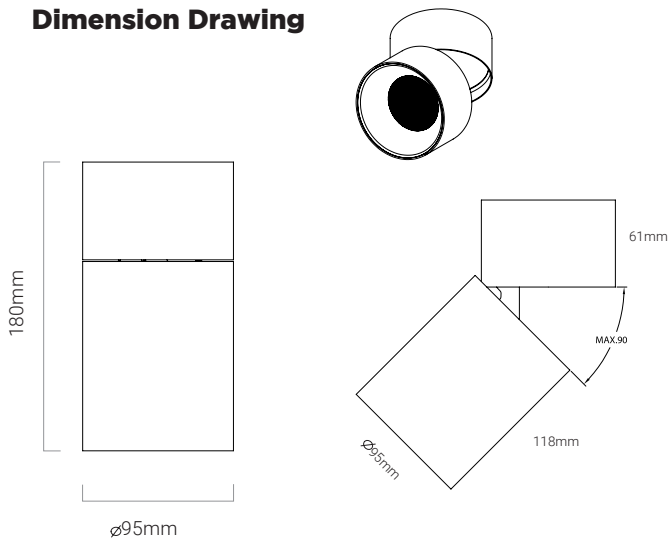

## Technical Parameters

<b>Input Current</b>	0.17A
<b>Output Voltage</b>	28-40V
<b>Flicker Free (Y/N)</b>	Yes
<b>Humidity</b>	20-80%
<b>Frequency</b>	50-60Hz
<b>In Rush Current</b>	30A
<b>Output Current</b>	850mA
<b>TA &amp; TC</b>	Ta:45°C   Tc:85°C
<b>IES (Yes or No)</b>	Yes

## Regulatory Qualifications

<b>Class Rating</b>	Class I
<b>Energy Efficiency</b>	A
<b>Certification</b>	CE, RoHS, IEC60598

## Accessories

<b>Optional accessories</b>	Removable Honey Comb net included
-----------------------------	-----------------------------------

## Packaging info

<b>Storage Temp</b>	-20°~50°
<b>Carton Size (mm)</b>	415*392*255
<b>QTY/CTN</b>	12
<b>Net Weight (kg)</b>	1,32
<b>Gross Weight (kg)</b>	1,25