



Pandora 3CCT PC Wall Light

Black - DOWN

Applications:

Residential and
Commercial Applications.

Wall lights are a creative way to brighten up your home. With the capability of being mounted on almost any foundation, you can bring a classic, modern look into your space.

For indoor use, wall lights look spectacular on either side of a mirror, in a hallway, by your bedside, or above your favourite picture frame. Some outdoor uses include patio areas, entryways, or on either side of doors or windows. They can also bring interest to a plain and open surface.

Our PANDORA IP65 surface mount 3CCT wall light comes in Matt Black with optional 6W Down and 12W Up&Down. If black is not your preference, simply customise with our White Snap-on Trim. The 3CCT built-in dipswitch allows you to easily switch your colour temperature according to your task at hand.

Product Performance

Wattage	6W Down
Colour Temperature & Stock Code	3CCT(3000K/4000K/6000K) R402
Operating Temperature	-20~40°C
Life Span/ LB Rating	L70B50@25000hr
IP Rating	IP65
LED Driver Brand	High Spec PioLED Driver
Beam Angle	50°
Impact Protection Grade	IK06
Input Voltage	220V- 240VAC
Surge Protection	1
Power Factor	0,7
CRI	80
Lumen Output	500lm
LED Chips	2835 Sanan
LED Chips Qty	2*6
Dimmable	No
Dimmable Range	-
UGR	25
(Dali/Trailing/Leading)	-


Physical Characteristics

Weight (g)	400
Housing Material	PC+ABS
Product Dimensions (mm)	200*125*39
Cable Length	-
Mounting Option	Surface Mount
Bracket Material	-
Bolts and Screws	-


Packaging



Luminous Intensity Distribution Diagram

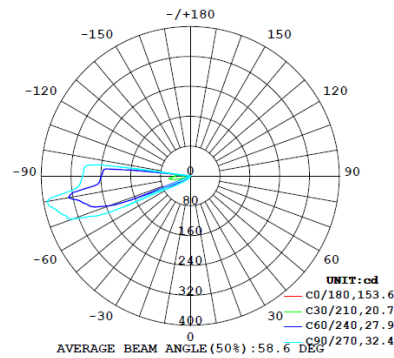

Dimension Drawing

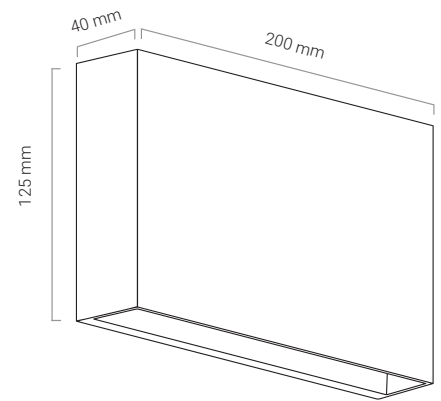

Technical Parameters

Input Current	0,04
Output Voltage	10-20V DC
Flicker Free (Y/N)	Yes
Humidity	0-90%RH
Frequency	50/60HZ
In Rush Current	10A Max
Output Current	300mA
THD	<70%
TA & TC	TA=50°C/TC=85°C

Regulatory Qualifications

Class Rating	Class I
Energy Efficiency	A
Certification	CE, IEC60598, ErP

Accessories

Optional accessories White PC Case for Pandora Down **R404**

Packaging info

Storage Temp	-20~+60°C
Carton Size (mm)	43.5*28*28.5
QTY/CTN	20
Net Weight	9
Gross Weight	10,5