



Urban Back-lit LED Panels

36W

Applications:

Residential and Commercial Applications.

Backlit LED Panels have a durable yet minimal design which allows for easy installations in drop-in ceilings or surface mount applications. The LEDs are situated on the back plate of the panel alleviating excess light guides allowing for a more cost effective LED Lighting Solution.

Our Backlit LED Technology evenly diffuses its SMD LED chips without creating dark spots with no risk of discoloration. Dimmable/Dali options available.

Product Performance

Wattage	36W (18-40W)
Colour Temperature & Stock Code	3CCT (4000K_5000K_6000K) - iB121
Operating Temperature	-20~40°C
Life Span/ LB Rating	L80B10@50 000hrs
IP Rating	IP40
LED Driver	PioLED Driver
Beam Angle	120°
Impact Protection Grade	-
Input Voltage	180V-277V
Surge Protection	1.5kV
Power Factor	0.9
CRI	>80
Lumen Output	Around 150lm/W
Lumen Efficiency	150
LED Chips	2835 SMD
LED Chips Qty	192
LED Chip Brand	Sanan
Dimmable	Yes with 26-40W Driver - Dali Dim - iB101DA 40W-Dim 30-42V 1000mA - i101Di
Dimmable Range	-
(Dali/Trailing/Leading)	-
UGR	>19


Physical Characteristics

Weight (g)	3200
Housing Material	Aluminium & Iron
Product Dimensions (mm)	1195*595*32
Cable Length	15cm
Mounting Option	Surface/Hanging/Recessed
Bolts and Screws	Stainless Steel

Packaging



Dimension Drawing

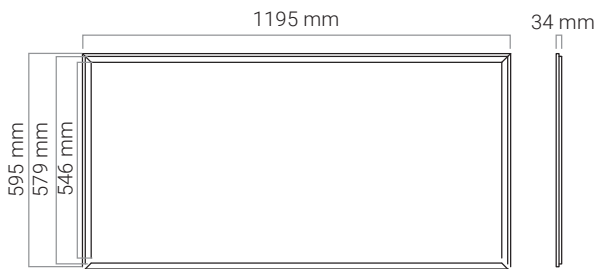

Current	Wattage	Lumen	Efficiency
1100mA	40,5	6034,7	149,00
1050mA	38,4	5760,3	150,01
1000mA	36,4	5496,5	151,00
950mA	34,4	5206,1	151,34
900mA	32,4	4924,2	151,98
850mA	30,4	4651,6	153,01
800mA	28,6	4404,9	154,02
750mA	26,9	4169,4	155,00
700mA	24,9	3884,8	156,02
650mA	23,1	3626,5	156,99
600mA	21,3	3365,6	158,01
550mA	19,4	3084,1	158,97
500mA	17,6	2816,3	160,02

Technical Parameters

Input Current <350mA

Output Voltage 27-42V

Humidity 80%

Frequency 50-60Hz

In Rush Current -

Output Current 950mA

THD <15%

TA & TC 45/90

Flicker (Y/N) No Flicker

IES (Yes or No) Yes

Regulatory Qualifications

Class Rating Class II

Energy Efficiency A

Certification IEC60598, TUV, CE, EMC, LVD, SAA, RoHS, SO9001

Accessories

Optional accessories

11-13 Gears Driver - **iB123PS**
 36W 6x12 Urban back-lit no flicker driver 5Y 125-65 - **iB121PS**
 26-40W Driver - Dali Dim - **iB101DA**
 40W-Dim 30-42V 1000mA - **i101Di**
 6x12 Back-Lit H65 Surface Mount Case - **iB612**
 6x12 hanging kit - 1M x 6 - **i6121**
 Extra 2Meter SS x 1 - **i600**
 5Amp-3meter - **R111**

Packaging info

Storage Temp -20~80°C

Carton Size (mm) 1215*215*620

QTY/CTN 6


Net Weight 9.5

Gross Weight 10.85

E&OE

PioLED Lighting (Pty) Ltd | 031 701 5746 | info@pioledlighting.co.za

www.pioledlighting.co.za



Urban Back-lit Accessories




600x1200 Hanging Kit

36W 6x12 Urban back-lit
Flicker Free 5 Year driver



Dali Dimmable Driver

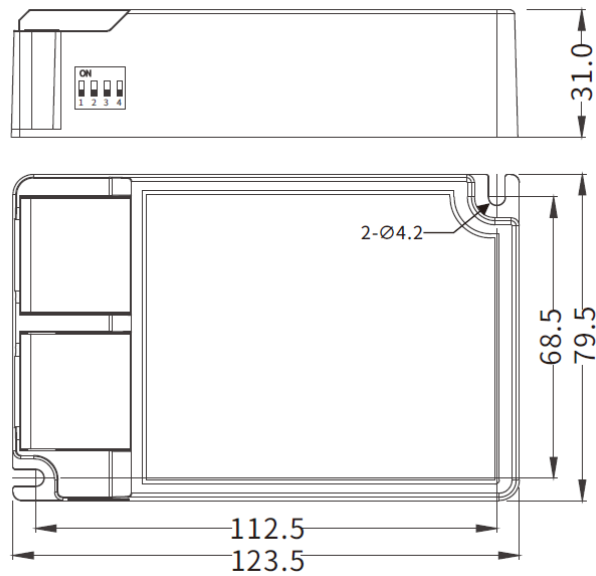

Surface Mount Case

