



Vent 10 Step/ Wall Light


1.5W

Applications:


Residential and
Commercial Applications.

Product Performance	
Wattage	1.5W
Colour Temperature & Stock Code	White 3CCT(3000K/4000K/6000K) R410 Black 3CCT(3000K/4000K/6000K) R411
Operating Temperature	-20~40°C
Life Span/ LB Rating	L70B50@25000hr
IP Rating	IP65
LED Driver Brand	High Spec PioLED Driver
Beam Angle	67°
Impact Protection Grade	IK06
Input Voltage	220V- 240VAC
Surge Protection	1
Power Factor	>0,5
CRI	>83
Lumen Output	80lm
Lumen Efficiency	73lm/W
LED Chips	2835 Sanan
LED Chips Qty	2*12
Dimmable (Dali/Trailing/Leading)	No
Dimmable Range	-
UV Resistance	>4
(Dali/Trailing/Leading)	-
Physical Characteristics	
Weight (g)	80
Housing Material	PC+ABS
Product Dimensions (mm)	100*60*33
Cable Length	-
Mounting Option	Surface Mount
Bracket Material	-
Bolts and Screws	-

Packaging

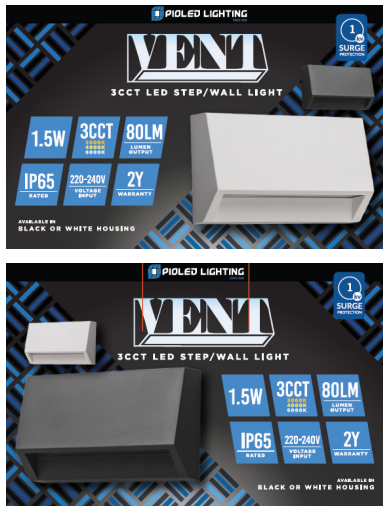

Dimension Drawing

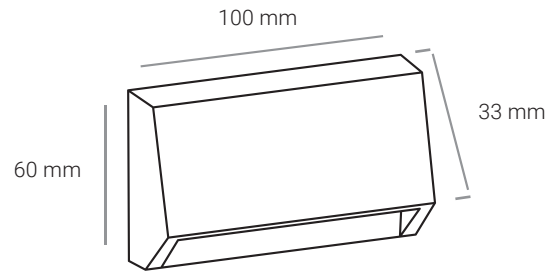

Technical Parameters

Input Current	0,02
Output Voltage	-
Flicker Free (Y/N)	Yes
Humidity	0-90%RH
Frequency	50/60HZ
In Rush Current	7A Max
Output Current	-
THD	<150%
TA & TC	TA=50°C/TC=85°C
IES (Yes or No)	-

Regulatory Qualifications

Class Rating	Class II
Energy Efficiency	E
Certification	CE, EMC, IEC60598

Accessories

Optional accessories	-
-----------------------------	---

Packaging info

Storage Temp	-20~+60°C
Carton Size (mm)	23.5*23*38
QTY/CTN	50
Net Weight	5
Gross Weight	6,3