



9.6W IP20 Strip Light

24V (8mm)

Applications:

Residential and Commercial Applications.

- Highly customizable with cutting points every 50mm.
- Genuine 3M adhesive backing tape for safe and quick installation.
- High CRI>80 ideal for specialized environments which require high colour rendering.
- 120° wide beam angle LED strip.
- Increase the LED lifespan whilst reducing lumen decay by adding either our surface, recessed or corner pure aluminium profiles.
- Safe to use in open areas as the LED strip provides minimal heat and is only 12V and 24V.
- Available in either IP20 or fully encased coated IP65.
- 2/3oz thick PCB for super fast heat dissipation.
- All our LED strips are dimmable when coupled with our wireless dimmer.
- Ideal for commercial/residential applications.


Product Performance

Wattage	9.6W
Colour Temperature & Stock Code	1m 6000K - S213 10m 6000K - SR213 50m Proj 6000K - SR213A 1m 4000K - S215 10m 4000K - SR215 50m Proj 4000K - SR215A 1m 3000K - S214 10m 3000K - SR214 50m Proj 3000K - SR214A
Life Span/ LB Rating	25000hrs
IP Rating	IP20
Beam Angle	120°
Input Voltage	24V DC
Cutting Point	5 cm
CRI	>80
LED Chips	Single Colour SMD 2835
LED Chips Qty	120/m
Lumen Output	1000lm/m
Dimmable	Dimmable with PS014, PS015 & PS016
Dimmable Range	0-12V
Note	Max 6m Run in series off a power feed

Physical Characteris-

Weight (g)	90
Product Dimensions	1x8x1000mm
Mounting Option	Back Adhesive
Cable Length	20cm

Dimension Drawing

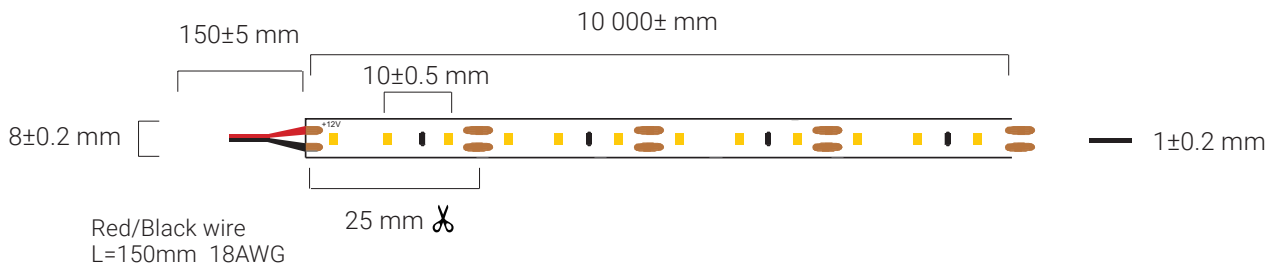

Technical Parameters

Input Current 4A

Regulatory Qualifications

Class Rating Class I

Energy Efficiency A

Certification CE, RohS

Packaging info

Carton Size (mm) 62*47.2*28

QTY/CTN 1000m

Net Weight 18,7

Gross Weight 20,8

Accessories

Optional accessories

- R004** - Wireless dimmer 12V/24V with Remote- 5M
- R010** - 8mm Single Colour 2way Connector
- R011** - 8mm Single Colour Connector

STRIP LIGHT ACCESSORIES



R004

Wireless dimmer 12V/24V with Remote- 5M. Max 6Amp
L115 x W56 x H34

E&OE

PioLED Lighting (Pty) Ltd | 031 701 5746 | info@pioledlighting.africa

www.pioledlighting.co.za

12/24V STRIP LIGHT FAST CONNECTORS



R134

FAST 2way connector with 10cm cable in between for **8mm** COB/SMD



R135

FAST 2way connector with 10cm cable in between for **10mm** SMD



R136

FAST 2way connector with 10cm cable in between for **10mm** RGB SMD

Works with IP20 14.4W SMD

R124

FAST connector 10cm tails to RGB strip **10mm**

4 PIN
10 MM



R125

FAST connector RGB strip to strip **10mm**



R137

FAST L connector RGB strip to strip **10mm**



Works with IP20 18W RGBW (4000K) SMD

R126


FAST connector 10cm tails to RGBW strip **10mm**

5 PIN
10 MM



R127

FAST connector RGBW strip to strip **10mm**



Works with IP20 10W COB, 4.8W and 9.6W SMD

R120

FAST connector 10cm tails to strip **8mm** COB/SMD

2 PIN
8 MM




R121

FAST connector strip to strip **8mm** COB/SMD



R133

FAST L and T seamless connector strip to strip **8mm** COB/SMD



Works with IP20 14.4W SMD

R122

FAST connector 10cm tails to strip **10mm** SMD

2 PIN
10 MM



R123

FAST connector strip to strip **10mm** SMD



R129

FAST L connector strip to strip **10mm** SMD works with IP20 14.4W SMD



ALL
CONNECTORS
FIT IN OUR
ALUMINIUM
PROFILES