



10W IP65 Neon 0408 Strip Light


24V

Applications:

Residential and
Commercial Applications.

Product Performance	
Wattage	10W
Colour Temperature & Stock Code	1m 6000K - S311 30m 6000K - SR311 1m 4000K - S312 30m 4000K - SR312 1m 3000K - S313 30m 3000K - SR313
Life Span/ LB Rating	25000hrs
IP Rating	IP65
Beam Angle	120°
Input Voltage	24V DC
Cutting Point	3.4 cm
CRI	>9
LED Chips	2835
LED Chips Qty	180/m
Lumen Output	280lm/m
Dimmable	Dimmable with PS014, PS015 & PS016
Dimmable Range	0-24V
Note	10m max run in series
Physical Character-	
Weight (g)	1900
Product Dimensions	4x8x3000mm
Mounting Option	Back Adhesive
Cable Length	200cm

Dimension Drawing

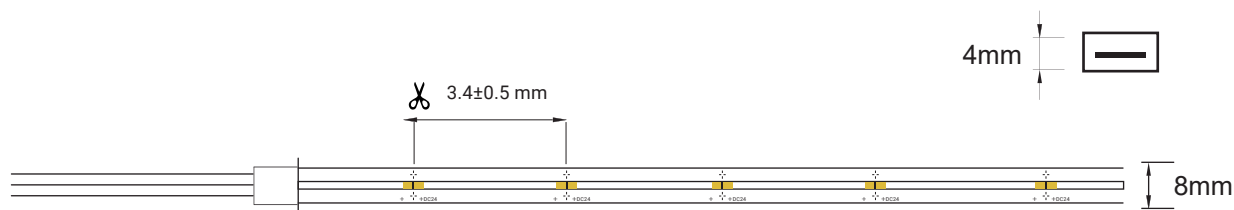

Technical Parameters

Input Current	12.5A
Regulatory Qualifications	
Class Rating	Class I
Energy Efficiency	A
Certification	CE, RohS
Packaging info	
Carton Size (mm)	37*37*33
QTY/CTN	150m
Net Weight	9
Gross Weight	10
Accessories	

Optional accessories

R004 - Wireless dimmer 12V/24V with Remote- 5M

S311A - Neon 0408 AL clip with two screws

S311B - Neon 0408 Silicon End Cap with hole

S311C - Neon 0408 Silicon End Cap without hole

STRIP LIGHT ACCESSORIES



R004

Wireless dimmer 12V/24V with Remote- 5M. Max 6Amp
L115 x W56 x H34



S311A

Neon 0408 AL clip with two screws



S311B

Neon 0408 Silicon End Cap with hole



S311C

Neon 0408 Silicon End Cap without hole

E&OE

PioLED Lighting (Pty) Ltd | 031 701 5746 | info@pioledlighting.africa

www.pioledlighting.co.za