A60 LED Lamp

9.5W



Applications:
Residential and Commercial Applications.

Help reduce your electricity bill by converting your bulbs to LED! The PioLED A60 9.5W is the ideal domestic lamp. Available in Warm White, Natural White & Cool White with bases of E27 or BC.

Our A60 9.5W is a maintenance-free, environmentally friendly alternative to incandescent lamps. LED products contain no mercury, lead, or other harmful substances, reducing your carbon footprint tremendously.

Product Performance	
Wattage	9.5W
Colour Temperature & Stock Code	6000K (ES) **B016** | 3000K (ES) **B017** | 4000K (ES) **B018** 6000K (BC) **B019** | 3000K (BC) **B020**
Operating Temperature	-10~40°C
Life Span/ LB Rating	L70B50@25000hrs
IP Rating	IP20
LED Driver	linear IC
Beam Angle	210°
Impact Protection Grade	-
Input Voltage	200V-240V
Surge Protection	0.5kV
CRI	>80
Lumen Output	1000-1080 Lumens
LED Chips	2835
LED Chips Qty	8
LED Chip Brand	Sanan
Dimmable (Dali/Trailing/Leading)	Non-Dimmable
Dimmable Range	-
(Dali/Trailing/Leading)	-
UGR	-
Physical Characteristics	
Weight (g)	28.1
Housing Material	Aluminum + PC
Product Dimensions (mm)	60*110mm
Cable Length	-
Mounting Option	-
Bracket Material	-

Luminous Intensity Distribution Diagram

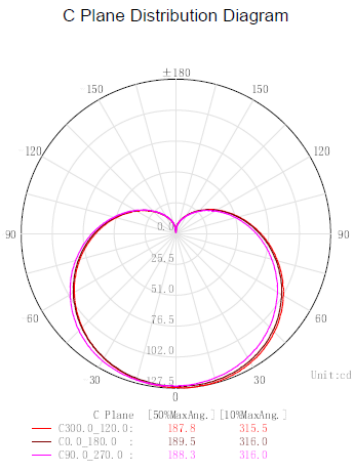

Packaging



Dimension Drawing



Technical Parameters	
Input Current	75mA
Output Voltage	270V
Flicker(Y/N)	No Flicker
Humidity	80%
Frequency	50/60Hz
In Rush Current	-
Output Current	30mA
THD	-
TA & TC	-
IES (Yes or No)	Yes
Regulatory Qualifications	
Class Rating	Class II
Energy Efficiency	B016 - 107,44lm/W - **F** B017 - 106,59lm/W - **F** B018 - 115,91lm/W - **E** B019 - 107,44lm/W - **F** B020 - 106,59lm/W - **F**
Certification	CE
Accessories	
Optional accessories	---
Packaging info	
Storage Temp	-20°C~+80°C
Carton Size (mm)	33*33*24
QTY/CTN	50
Net Weight	2
Gross Weight	2.78

E&OE

PioLED Lighting (Pty) Ltd | 031 701 5746 | info@pioledlighting.africa
www.pioledlighting.co.za