



DYCE COB Dotless Strip Light

10W | 24V

Applications:

Residential and Commercial Applications.

- High CRI>80 ideal for specialized environments which require high colour rendering.
- 180° wide beam angle LED strip.
- Sanan SMD LED Chips with an efficacy of > 100lm/W.
- Increase the LED lifespan whilst reducing lumen decay by adding either our surface, recessed or corner pure aluminium profiles.
- Available in fully encased coated IP65.
- Available in either Warm White 3000K, Neutral White 4000K, Cool White 6000K, catering for all application requirements.
- Ideal for commercial/ residential applications.

Product Performance

Wattage	10W
Colour Temperature & Stock Code	50m 6000K-SWR301A 50m 4000K-SWR302A 50m 3000K-SWR303A 1m 6000K-SW301 1m 4000K-SW302 1m 3000K-SW303
Life Span/ LB Rating	25000hrs
IP Rating	IP65
Beam Angle	180°
Input Voltage	DC24V
Cutting Point	2.5 cm
Power Factor	>0.9
CRI	>80
Lumen Output	>1000lm/M
Lumen Efficiency	>100lm/W
LED Chips	COB
LED Chips Qty	280
Dimmable	Dimmable with PS014, PS015 & PS016
Note	Max 6 metre run without voltage drop

Physical Characteristics

Product Dimensions (mm)	10*4.5
Mounting Option	Double sided tape


Technical Parameters

Input Current	0.583A
Regulatory Qualifications	
Class Rating	Class I
Energy Efficiency	A
Certification	CE, EMC

Packaging



Dimension Drawing

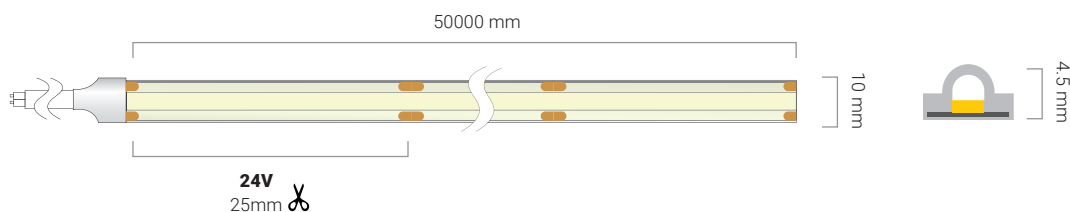

Accessories

Optional accessories

- XA030** - DYCE Quick Connector with wire (OPTIONAL **XA0301**)
- XA031** - DYCE Strip to Strip Connector
- XA032** - DYCE L Connector
- XA033** - DYCE End CAP
- XA034** - DYCE Waterproof CAP with Cable

Packaging info

Carton Size (mm)	255*255*105
QTY/CTN	50
Net Weight	2,6
Gross Weight	2,8

DYCE STRIP LIGHT CONNECTOR ACCESSORY



XA030
DYCE Quick Connector
with wire 0.5m2 for 24V

OPTIONAL **XA0301** -
Connector with 1 meter wire
for 24V



XA031
DYCE Strip to Strip
Connector
L 35.5 x W 15.3 x H 8.5



XA032
DYCE L Connector
L 24 x W 24 x H 8.5



XA033
DYCE End CAP
L 11 x W 12 x H 7



XA034
DYCE Waterproof
CAP with Cable
L 120 x W 5.2 x H 3.2
L 22 x W 12 x H 7

E&OE